



STC **NARROW BODY**
CANDIDATE SW SERIES
FORD



CANDIDATE SW SERIES

**Narrow Body Single Rear Wheel • Heavier GVWR
Larger Entry Door • More Interior Height and Room**



CANDIDATE SW

Startrans Bus now offers the Candidate SW steel body shuttle bus, complimenting the successful Senator SII series. This vehicle is available both in shuttle bus and paratransit versions. Having a narrow body width affords operators a more maneuverable vehicle for their fleet service. The new Candidate SW features updated exterior styling and is designed with durability in mind. Seven passenger seats plus one wheelchair or nine passengers for the paratransit bus or 11 forward facing seats for the shuttle model.

TRAVEL TESTED.

All of our StarTrans products undergo a series of rugged testing procedures in Altoona, Pennsylvania, to assure their structural integrity. And we back our buses with a five year / 75,000 mile body structure warranty.



CLOCKWISE FROM TOP
Open floorplan with fold away seats
Optional paratransit lift
Standard high back driver's seat and switch console

CANDIDATE SW SERIES FEATURES

SUBFLOOR – 12-gauge steel superstructure fully welded with floor-level Z-rails, incorporated with chassis-rubber ride capabilities.

FLOORING – 3/4" FRP, undercoated. Floor covered with 1/8" transit rubber. Formed galvaneal steel heat shields over chassis, catalytic converter, and muffler.

SIDEWALLS – 1" Polyurethane foam insulation (R-7) enclosed within a fully laminated assembly. Ladder-framed sidewalls are fully welded of 14-gauge steel. Exterior sidewall skins are .024" galvanized steel with baked-enamel paint finish.

ROOFING – Roof framing is a fully welded assembly utilizing formed steel-hat section crossmembers, as well as heavy-duty steel roll bars welded at the front, rear, and center of the vehicle. Roof exterior skins are of .024" galvanized steel with baked-enamel paint finish.

WINDOWS – 24"x54" T-Slider windows, 31% tinted. Clamp ring-style radius windows. Egress windows installed to meet FMVSS 217 requirements. Operator's curbside window AS-2 rated.

ENTRY – Spacious entry (32"x77") with doors that operate manually or electric. The 14-gauge steel door frames are fully welded and powder-coated to enhance durability. The door panels are glazed and tempered glass. White step nosing and lighted stepwell standard. Entrance grab rail (left side).

LIGHTING – Each bus comes standard with four passenger courtesy lights.

ELECTRICAL – Wiring is color-coded with the number and function designated every 12" on the wire to enable identification and circuit traceability. Only premium components built to meet the Society of Automotive Engineers (S.A.E.) and Underwriters Laboratories (U.L.) requirements are used. Electronic control console switch panel.

OPTIONAL A/C & HEAT – A/C systems ranging in size from 30,000 BTU to 68,000 BTU. Rear heat 20,000 BTU to 65,000 BTU.

OPTIONAL PARATRANSIT – Wheelchair accessibility with a wide range of securement systems and seating arrangements.

OPTIONAL LUGGAGE – Luggage can be stored in floor-to-ceiling, rear compartment, or custom-designed areas.

OPTIONAL SEATING – Forward-facing, perimeter-style, and track seating are all available. Your choice of vinyl and cloth fabric in a wide range of colors.


- White baked-enamel prepainted body = bright white gelcoated front cap
- Black exterior mirrors – 8" x 15"
- Heavy-duty, 14-gauge formed bumper with anti-ride cover
- Mud flaps (front and rear)
- 12-month/12,000-mile with five-year/75,000-mile warranty of body structure

FORD SPECIFICATIONS


- E350
- Tinted glass
- Automatic transmission
- 4:10 rear-axle ratio
- Power steering
- Power brakes (4-wheel disc)
- Dash A/C and heater
- Auxiliary transmission cooler (gas chassis only)
- Super engine cooling
- Tilt steering and cruise control
- 5.4 gas engine
- 40-gallon fuel capacity
- Radial tires LT245-75R-16E
- Chrome front bumper
- Comfort-ride suspension – H.D. springs and shocks
- Engine oil cooler (diesel chassis only)
- Read-out gauges
- Heavy-duty batteries
- Single alternator-Gas 155 amp
- 138" wheelbase
- GVWR 10,050

Dimensions


- Exterior width – 81"
- Exterior height – 114"
- First step to ground – 12" second- and third-step riser – 10" max.
- Step tread depth – 9.5" max.
- Interior width at seat level – 77"
- Interior width up 36" from floor – 77"
- Center aisle height – 74"
- Double wheelchair doors – 44.5" x 59.5"

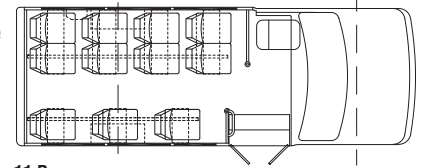


11 Passenger

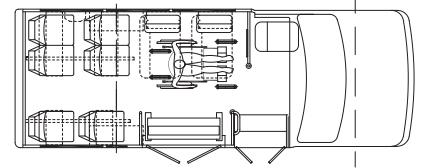


6 + 4 Passenger & 2 W/C

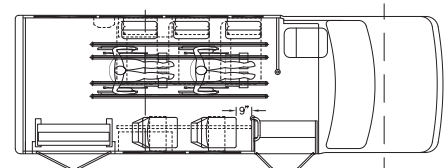

6 + 2 Passenger & 2 W/C

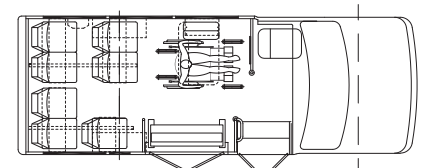

7 + 2 Passenger & 1 W/C

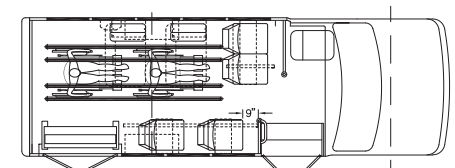

4 + 4 Passenger & 2 W/C

Due to Supreme Corporation's commitment to product quality, specifications and options are subject to change in the interest of product improvement and market changes.

Floorplans shown are only a few of the designs available.



Established 1983

2592 East Kercher Road • Goshen, IN 46528
574-642-4730 • 877-258-1391 • FAX 574-642-4108
www.StarTransBus.com



Please call today for a dealer near you.